
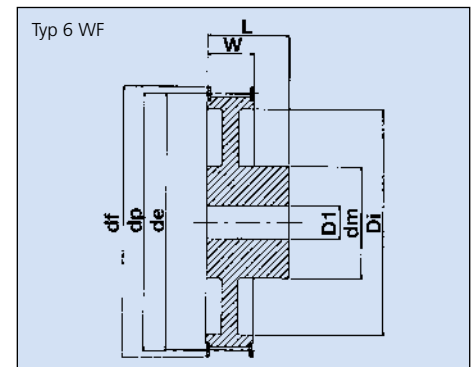


HTD-Zahnriemenscheiben



8M-85 (Teilung = 8 mm) – für Zahnriemenbreite = 85 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Abmessungen in mm							
				de	dp	dm	Di	df	W	L	D1
22-8M-85	22	6F	St	54,65	56,02	43,0	–	60,0	95,0	105,0	12,0
24-8M-85	24	6F	St	59,75	61,12	45,0	–	66,0	95,0	105,0	12,0
26-8M-85	26	6F	St	64,85	66,21	48,0	–	70,0	95,0	105,0	12,0
28-8M-85	28	6F	St	70,08	71,30	50,0	–	75,0	95,0	105,0	15,0
30-8M-85	30	6F	St	75,13	76,39	55,0	–	83,0	95,0	105,0	15,0
32-8M-85	32	6F	St	80,16	81,49	60,0	–	87,0	95,0	105,0	15,0
34-8M-85	34	6F	St	85,22	86,58	66,0	–	91,0	95,0	105,0	15,0
36-8M-85	36	6F	St	90,30	91,67	70,0	–	97,0	95,0	105,0	15,0
38-8M-85	38	6F	St	95,39	96,77	75,0	–	102,0	95,0	105,0	15,0
40-8M-85	40	6F	St	100,49	101,86	75,0	–	106,0	95,0	105,0	18,0
44-8M-85	44	6F	St	110,67	112,05	75,0	–	120,0	95,0	105,0	18,0
48-8M-85	48	6F	St	120,86	122,23	80,0	–	128,0	95,0	105,0	18,0
56-8M-85	56	6F	St	141,23	142,60	90,0	–	150,0	95,0	105,0	20,0
64-8M-85	64	10WF	St	161,60	162,97	100,0	137,0	168,0	95,0	95,0	20,0
72-8M-85	72	10WF	St	181,97	183,35	100,0	158,0	192,0	95,0	95,0	20,0
80-8M-85	80	10A	GG	202,35	203,72	110,0	180,0	–	95,0	95,0	20,0
90-8M-85	90	10A	GG	227,81	229,18	110,0	204,0	–	95,0	95,0	20,0
112-8M-85	112	10A	GG	283,83	285,21	110,0	254,0	–	95,0	95,0	24,0
144-8M-85	144	10A	GG	365,32	366,69	110,0	336,0	–	95,0	95,0	24,0
168-8M-85	168	10A	GG	426,44	427,81	120,0	400,0	–	95,0	95,0	24,0
192-8M-85	192	10A	GG	487,55	488,92	130,0	460,0	–	95,0	95,0	24,0

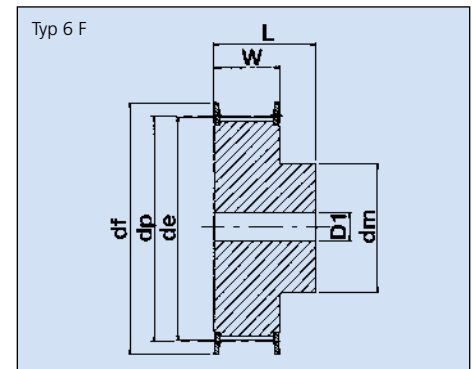

14M-40 (Teilung = 14 mm) – für Zahnriemenbreite = 40 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Abmessungen in mm							
				de	dp	dm	Di	df	W	L	D1
28-14M-40	28	6F	St	122,12	124,78	100,0	–	128,0	54,0	69,0	24,0
29-14M-40	29	6F	St	126,57	129,23	100,0	–	138,0	54,0	69,0	24,0
30-14M-40	30	6F	St	130,99	133,69	100,0	–	138,0	54,0	69,0	24,0
32-14M-40	32	6F	St	139,88	142,60	100,0	–	154,0	54,0	69,0	24,0
34-14M-40	34	6F	St	148,79	151,52	100,0	–	160,0	54,0	69,0	24,0
36-14M-40	36	6F	St	157,68	160,43	100,0	–	168,0	54,0	69,0	24,0
38-14M-40	38	6F	St	166,60	169,34	120,0	–	183,0	54,0	69,0	24,0
40-14M-40	40	6F	St	175,49	178,25	120,0	–	188,0	54,0	69,0	24,0
44-14M-40	44	6F	St	193,28	196,08	120,0	–	211,0	54,0	69,0	24,0
48-14M-40	48	6WF	GG	211,11	213,90	135,5	170,0	226,0	54,0	69,0	24,0
56-14M-40	56	6WF	GG	246,76	249,55	135,5	207,0	256,0	54,0	69,0	28,0
64-14M-40	64	6WF	GG	282,41	285,21	135,5	240,0	296,0	54,0	69,0	28,0
72-14M-40	72	6A	GG	318,06	320,86	135,5	278,0	–	54,0	69,0	28,0
80-14M-40	80	6A	GG	353,71	356,51	135,5	314,0	–	54,0	69,0	28,0
90-14M-40	90	6A	GG	398,28	401,07	135,5	358,0	–	54,0	69,0	28,0
112-14M-40	112	6A	GG	496,32	499,11	135,5	456,0	–	54,0	69,0	28,0
144-14M-40	144	6A	GG	638,92	641,71	135,5	600,0	–	54,0	69,0	28,0
168-14M-40	168	6A	GG	745,87	748,66	135,5	706,0	–	54,0	69,0	28,0
192-14M-40	192	6A	GG	852,82	855,62	135,5	813,0	–	54,0	69,0	28,0
216-14M-40	216	6A	GG	959,76	962,57	150,0	920,0	–	54,0	69,0	28,0

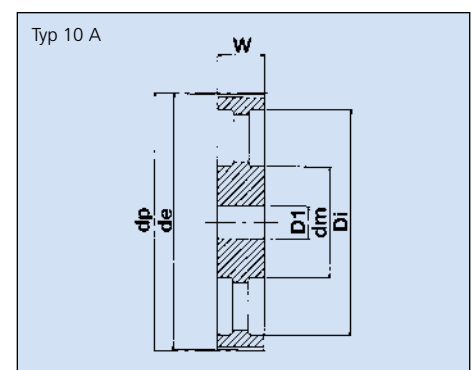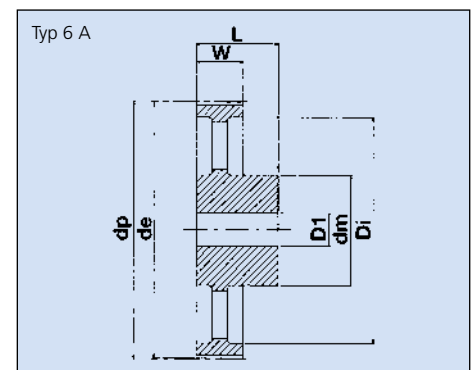

14M-55 (Teilung = 14 mm) – für Zahnriemenbreite = 55 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Abmessungen in mm							
				de	dp	dm	Di	df	W	L	D1
28-14M-55	28	6F	St	122,12	124,78	100,0	–	128,0	70,0	85,0	24,0
29-14M-55	29	6F	St	126,57	129,23	100,0	–	138,0	70,0	85,0	24,0
30-14M-55	30	6F	St	130,99	133,69	100,0	–	138,0	70,0	85,0	24,0
32-14M-55	32	6F	St	139,88	142,60	100,0	–	154,0	70,0	85,0	24,0
34-14M-55	34	6F	St	148,79	151,52	100,0	–	160,0	70,0	85,0	24,0
36-14M-55	36	6F	St	157,68	160,43	100,0	–	168,0	70,0	85,0	24,0
38-14M-55	38	6F	St	166,60	169,34	120,0	–	183,0	70,0	85,0	24,0
40-14M-55	40	6F	St	175,49	178,25	120,0	–	188,0	70,0	85,0	24,0
44-14M-55	44	6F	St	193,28	196,08	120,0	–	211,0	70,0	85,0	24,0
48-14M-55	48	10WF	GG	211,11	213,90	135,5	170,0	226,0	70,0	70,0	24,0
56-14M-55	56	10WF	GG	246,76	249,55	135,5	207,0	256,0	70,0	70,0	28,0
64-14M-55	64	10WF	GG	282,41	285,21	135,5	240,0	296,0	70,0	70,0	28,0
72-14M-55	72	10A	GG	318,06	320,86	135,5	278,0	–	70,0	70,0	28,0
80-14M-55	80	10A	GG	353,71	356,51	135,5	314,0	–	70,0	70,0	28,0
90-14M-55	90	10A	GG	398,28	401,07	135,5	358,0	–	70,0	70,0	28,0
112-14M-55	112	10A	GG	496,32	499,11	135,5	456,0	–	70,0	70,0	28,0
144-14M-55	144	10A	GG	638,92	641,71	135,5	600,0	–	70,0	70,0	28,0
168-14M-55	168	10A	GG	745,87	748,66	135,5	706,0	–	70,0	70,0	28,0
192-14M-55	192	10A	GG	852,82	855,62	135,5	813,0	–	70,0	70,0	28,0
216-14M-55	216	10A	GG	959,76	962,57	150,0	920,0	–	70,0	70,0	28,0

