
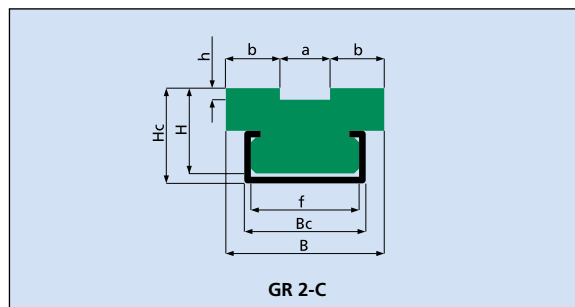


Kettenführungen

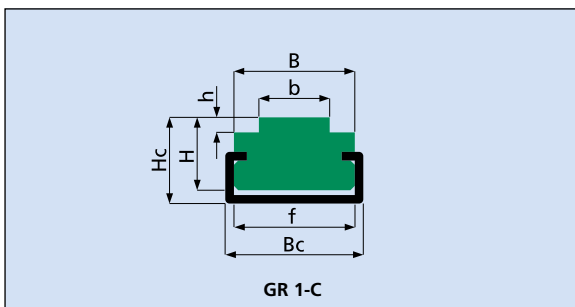

Typ GR 1-C

Artikel-Nr. Ketten Fuchs	Artikel-Nr. GR 1-C	Bezeichnung DIN-Nr. 8187	p × b1	B	b	H	Hc	Bc	h	f	C-Profil
GR1-C-083-1A	740223	083-1	1/2 × 3/16"	20,0	4,7	10,0	11,0	24,0	1,6	22,0	C-2452
GR1-C-083-1B	741223	083-1	1/2 × 3/16"	17,0	4,7	15,0	17,0	20,0	1,6	17,0	C-2010
GR1-C-084-1	740220	084-1	1/2 × 3/16"	20,0	4,6	10,0	15,0	20,0	1,6	17,0	C-2010
GR1-C-085-1	740230	085-1	1/2 × 1/4"	17,0	6,2	15,0	17,0	20,0	2,1	17,0	C-2010
GR1-C-08B-1	740240	08 B-1	1/2 × 5/16"	20,0	7,5	10,0	15,0	20,0	2,2	17,0	C-2010
GR1-C-08B-1	741240	08 B-1	1/2 × 5/16"	17,0	7,5	15,0	17,0	20,0	2,2	17,0	C-2010
GR1-C-086-1	740300	086-1	5/8 × 1/4"	17,0	6,3	15,0	17,0	20,0	2,6	17,0	C-2010
GR1-C-10B-1	740310	10 B-1	5/8 × 3/8"	17,0	9,3	15,0	17,0	20,0	2,6	17,0	C-2010
GR1-C-12B-1	740400	12 B-1	3/4 × 7/16"	20,0	11,3	15,0	17,0	20,0	3,0	17,0	C-2010
GR1-C-12B-1	741400	12 B-1	3/4 × 7/16"	24,0	11,3	15,0	18,0	28,0	3,0	24,0	C-2812
GR1-C-16B-1	740510	16 B-1	1" × 17,02 mm	24,0	16,5	15,0	18,0	28,0	3,5	24,0	C-2812
GR1-C-20B-1	740600	20 B-1	1 1/4 × 3/4"	28,0	19,0	15,0	18,0	28,0	4,2	24,0	C-2812

Typ GR 2-C

Artikel-Nr. Ketten Fuchs	Artikel-Nr. GR 2-C	Bezeichnung DIN-Nr. 8187	p × b1	B	b	H	Hc	a	Bc	h	f	C-Profil
GR2-C-08B-2	750240	08 B-2	1/2 × 5/16"	21,4	7,5	15,0	17,0	6,4	20,0	2,2	17,0	C-2010
GR2-C-10B-2	750310	10 B-2	5/8 × 3/8"	25,9	9,3	15,0	17,0	7,3	20,0	2,6	17,0	C-2010
GR2-C-12B-2	750400	12B-2	3/4 × 7/16"	30,5	11,2	15,0	20,0	8,1	28,0	3,0	24,0	C-2812
GR2-C-16B-2	750510	16 B-2	1" × 17,02 mm	48,3	16,5	20,0	27,0	15,3	38,0	3,5	33,0	C-3818
GR2-C-20B-2	750600	20 B-2	1 1/4 × 3/4"	55,3	19,0	25,0	30,0	17,3	60,0	4,2	55,0	C-6020
GR2-C-24B-2	750700	24 B-2	1 1/2 × 1"	73,0	24,7	30,0	35,0	23,6	60,0	5,5	55,0	C-6020

Standardlänge: 2000 mm. Auf Wunsch jede Stärke und Länge lieferbar.
Weitere Kettenführungen, sowie Riemenführungen auf Anfrage.