


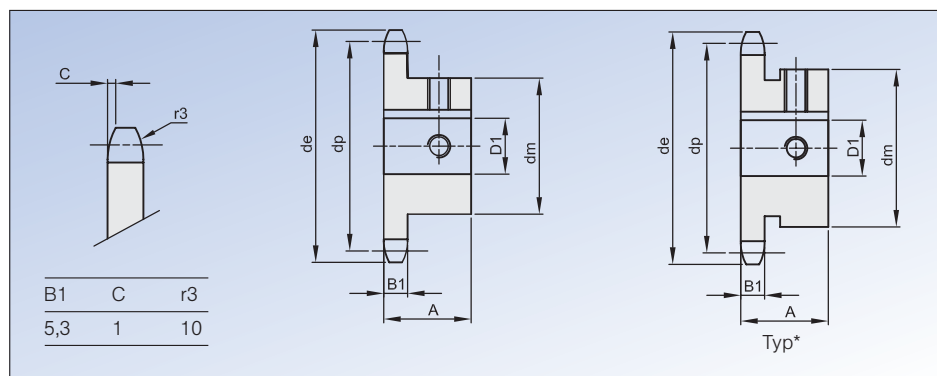

Kettenräder SB

DIN-Nr. 8187/ISO 606

Teilung 3/8"× 7/32"

9,525× 5,72 mm

Rolle 6,35 mm, 06B-1

- Kettenräder mit induktiv gehärteten Zähnen (HRC 50)
- Mit Fertigbohrung H7, Rauhtiefe 1,6
- Nut nach DIN-Nr. 6885/1, auf Zahnspitze, Nutbreite H9
- Zwei Gewinde, einmal auf Nut, einmal um 90° versetzt

Artikel-Nr. Ketten Fuchs	Zähne- zahl z	Abmessungen in mm							Gewinde M
		de	dp	dm	D1 (H7)	A	K (H9)	T2	
321110021SB24	21	67,6	63,91	48,0	24,0	28,0	8,0	3,3	6
321110021SB25	21	67,6	63,91	48,0	25,0	28,0	8,0	3,3	6
321110022SB20	22	70,6	66,93	50,0	20,0	28,0	6,0	2,8	5
321110022SB24	22	70,6	66,93	50,0	24,0	28,0	8,0	3,3	6
321110022SB25	22	70,6	66,93	50,0	25,0	28,0	8,0	3,3	6
321110023SB15	23	73,7	69,95	52,0	15,0	28,0	5,0	2,3	4
321110023SB16	23	73,7	69,95	52,0	16,0	28,0	5,0	2,3	4
321110023SB18	23	73,7	69,95	52,0	18,0	28,0	6,0	2,8	5
321110023SB19	23	73,7	69,95	52,0	19,0	28,0	6,0	2,8	5
321110023SB20	23	73,7	69,95	52,0	20,0	28,0	6,0	2,8	5
321110023SB22	23	73,7	69,95	52,0	22,0	28,0	6,0	2,8	5
321110023SB24	23	73,7	69,95	52,0	24,0	28,0	8,0	3,3	6
321110023SB25	23	73,7	69,95	52,0	25,0	28,0	8,0	3,3	6
321110024SB18	24	76,7	72,97	54,0	18,0	28,0	6,0	2,8	5
321110024SB19	24	76,7	72,97	54,0	19,0	28,0	6,0	2,8	5
321110024SB20	24	76,7	72,97	54,0	20,0	28,0	6,0	2,8	5
321110024SB22	24	76,7	72,97	54,0	22,0	28,0	6,0	2,8	5
321110024SB24	24	76,7	72,97	54,0	24,0	28,0	8,0	3,3	6
321110024SB25	24	76,7	72,97	54,0	25,0	28,0	8,0	3,3	6
321110024SB28	24	76,7	72,97	54,0	28,0	28,0	8,0	3,3	6
321110024SB30	24	76,7	72,97	54,0	30,0	28,0	8,0	3,3	6
321110025SB18	25	79,7	76,00	57,0	18,0	28,0	6,0	2,8	5
321110025SB20	25	79,7	76,00	57,0	20,0	28,0	6,0	2,8	5
321110025SB22	25	79,7	76,00	57,0	22,0	28,0	6,0	2,8	5
321110025SB24	25	79,7	76,00	57,0	24,0	28,0	8,0	3,3	6
321110025SB25	25	79,7	76,00	57,0	25,0	28,0	8,0	3,3	6
321110025SB28	25	79,7	76,00	57,0	28,0	28,0	8,0	3,3	6
321110025SB30	25	79,7	76,00	57,0	30,0	28,0	8,0	3,3	6
321110027SB20	27	85,7	82,05	60,0	20,0	28,0	6,0	2,8	5
321110027SB22	27	85,7	82,05	60,0	22,0	28,0	6,0	2,8	5
321110027SB24	27	85,7	82,05	60,0	24,0	28,0	8,0	3,3	6
321110027SB25	27	85,7	82,05	60,0	25,0	28,0	8,0	3,3	6
321110027SB28	27	85,7	82,05	60,0	28,0	28,0	8,0	3,3	6
321110027SB30	27	85,7	82,05	60,0	30,0	28,0	8,0	3,3	6
321110030SB20	30	94,8	91,12	60,0	20,0	30,0	6,0	2,8	5
321110030SB22	30	94,8	91,12	60,0	22,0	30,0	6,0	2,8	5
321110030SB24	30	94,8	91,12	60,0	24,0	30,0	8,0	3,3	6
321110030SB25	30	94,8	91,12	60,0	25,0	30,0	8,0	3,3	6
321110030SB28	30	94,8	91,12	60,0	28,0	30,0	8,0	3,3	6
321110030SB30	30	94,8	91,12	60,0	30,0	30,0	8,0	3,3	6