


Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm							
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
T10-1420	1420,0	142	10	12	16	20	25	32	50	75
T10-1440	1440,0	144	10	12	16	20	25	32	50	75
T10-1450	1450,0	145	10	12	16	20	25	32	50	75
T10-1460	1460,0	146	10	12	16	20	25	32	50	75
T10-1500	1500,0	150	10	12	16	20	25	32	50	75
T10-1560	1560,0	156	10	12	16	20	25	32	50	75
T10-1600	1600,0	160	10	12	16	20	25	32	50	75

Riemengewicht = $4,4 \times \text{g/m} \times \text{Breite in mm}$

Polyurethan- Zahnriemen

(endlos, metrische
Teilung)
Profil AT

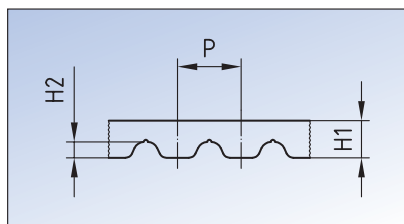

AT 5 (Teilung = 5,0 mm)

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm						
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)						
			6	8	10	12	16	20	25
AT5-225	225,0	45	6	8	10	12	16	20	25
AT5-255	255,0	51	6	8	10	12	16	20	25
AT5-275	275,0	55	6	8	10	12	16	20	25
AT5-280	280,0	56	6	8	10	12	16	20	25
AT5-300	300,0	60	6	8	10	12	16	20	25
AT5-330	330,0	66	6	8	10	12	16	20	25
AT5-340	340,0	68	6	8	10	12	16	20	25
AT5-375	375,0	75	6	8	10	12	16	20	25
AT5-390	390,0	78	6	8	10	12	16	20	25
AT5-420	420,0	84	6	8	10	12	16	20	25
AT5-450	450,0	90	6	8	10	12	16	20	25
AT5-455	455,0	91	6	8	10	12	16	20	25
AT5-480	480,0	96	6	8	10	12	16	20	25
AT5-500	500,0	100	6	8	10	12	16	20	25
AT5-525	525,0	105	6	8	10	12	16	20	25
AT5-545	545,0	109	6	8	10	12	16	20	25
AT5-600	600,0	120	6	8	10	12	16	20	25

AT 10 (Teilung = 10,0 mm)

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm							
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
AT10-370	370,0	37	10	12	16	20	25	32	50	75
AT10-500	500,0	50	10	12	16	20	25	32	50	75
AT10-560	560,0	56	10	12	16	20	25	32	50	75
AT10-580	580,0	58	10	12	16	20	25	32	50	75
AT10-600	600,0	60	10	12	16	20	25	32	50	75
AT10-610	610,0	61	10	12	16	20	25	32	50	75
AT10-630	630,0	63	10	12	16	20	25	32	50	75
AT10-660	660,0	66	10	12	16	20	25	32	50	75
AT10-700	700,0	70	10	12	16	20	25	32	50	75

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm							
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
T10-1610	1610,0	161	10	12	16	20	25	32	50	75
T10-1700	1700,0	170	10	12	16	20	25	32	50	75
T10-1750	1750,0	175	10	12	16	20	25	32	50	75
T10-1780	1780,0	178	10	12	16	20	25	32	50	75
T10-1880	1880,0	188	10	12	16	20	25	32	50	75
T10-1960	1960,0	196	10	12	16	20	25	32	50	75
T10-2250	2250,0	225	10	12	16	20	25	32	50	75

Typ	P mm	H2 mm	H1 mm
AT5	5,0	1,2	2,7
AT10	10,0	2,5	4,5
AT20	20,0	5,0	8,0

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm						
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)						
			6	8	10	12	16	20	25
AT5-610	610,0	122	6	8	10	12	16	20	25
AT5-620	620,0	124	6	8	10	12	16	20	25
AT5-630	630,0	126	6	8	10	12	16	20	25
AT5-660	660,0	132	6	8	10	12	16	20	25
AT5-670	670,0	134	6	8	10	12	16	20	25
AT5-710	710,0	142	6	8	10	12	16	20	25
AT5-720	720,0	144	6	8	10	12	16	20	25
AT5-750	750,0	150	6	8	10	12	16	20	25
AT5-780	780,0	156	6	8	10	12	16	20	25
AT5-825	825,0	165	6	8	10	12	16	20	25
AT5-860	860,0	172	6	8	10	12	16	20	25
AT5-975	975,0	195	6	8	10	12	16	20	25
AT5-1050	1050,0	210	6	8	10	12	16	20	25
AT5-1125	1125,0	225	6	8	10	12	16	20	25
AT5-1500	1500,0	300	6	8	10	12	16	20	25
AT5-2000	2000,0	400	6	8	10	12	16	20	25

Riemengewicht = $3,2 \times \text{g/m} \times \text{Breite in mm}$

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm							
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)							
			10	12	16	20	25	32	50	75
AT10-730	730,0	78	10	12	16	20	25	32	50	75
AT10-780	780,0	78	10	12	16	20	25	32	50	75
AT10-800	800,0	80	10	12	16	20	25	32	50	75
AT10-810	810,0	81	10	12	16	20	25	32	50	75
AT10-840	840,0	84	10	12	16	20	25	32	50	75
AT10-880	880,0	88	10	12	16	20	25	32	50	75
AT10-890	890,0	89	10	12	16	20	25	32	50	75
AT10-920	920,0	92	10	12	16	20	25	32	50	75
AT10-960	960,0	96	10	12	16	20	25	32	50	75