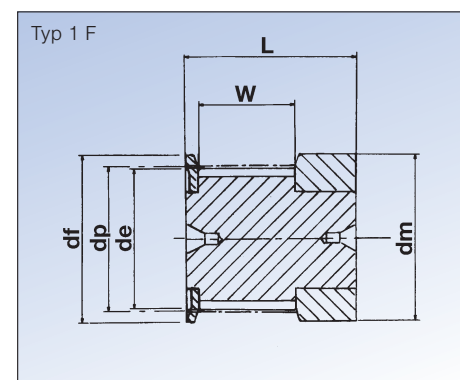
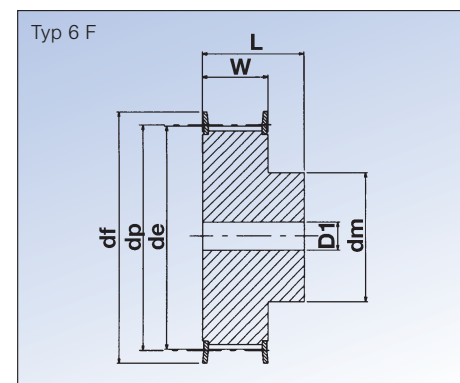
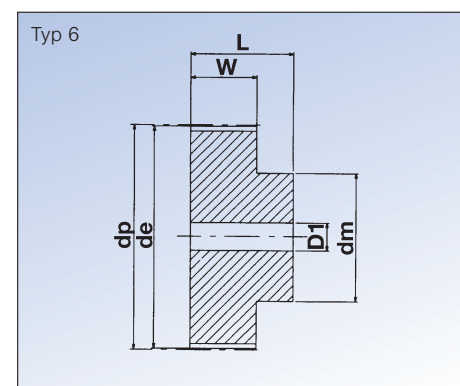


**T 2.5 (Teilung = 2,5 mm) – für Zahnriemenbreite = 6 mm**

| Artikel-Nr.<br>Ketten Fuchs | Zähne-<br>zahl | Typ | Werk-<br>stoff | Abmessungen in mm |       |      |    |      | W    | L    | D1  |
|-----------------------------|----------------|-----|----------------|-------------------|-------|------|----|------|------|------|-----|
|                             |                |     |                | de                | dp    | dm   | Di | df   |      |      |     |
| 16T2,5/12-2                 | 12             | 1F  | Al             | 9,00              | 9,60  | 13,0 | –  | 13,0 | 9,0  | 16,0 | –   |
| 16T2,5/14-2                 | 14             | 1F  | Al             | 10,60             | 11,20 | 15,0 | –  | 15,0 | 9,0  | 16,0 | –   |
| 16T2,5/15-2                 | 15             | 1F  | Al             | 11,40             | 12,00 | 15,0 | –  | 15,0 | 9,0  | 16,0 | –   |
| 16T2,5/16-2                 | 16             | 1F  | Al             | 12,20             | 12,80 | 16,0 | –  | 16,0 | 9,0  | 16,0 | –   |
| 16T2,5/18-2                 | 18             | 6F  | Al             | 13,80             | 14,40 | 10,0 | –  | 17,5 | 10,0 | 16,0 | –   |
| 16T2,5/19-2                 | 19             | 6F  | Al             | 14,60             | 15,20 | 10,0 | –  | 20,0 | 10,0 | 16,0 | –   |
| 16T2,5/20-2                 | 20             | 6F  | Al             | 15,40             | 16,00 | 11,0 | –  | 20,0 | 10,0 | 16,0 | –   |
| 16T2,5/22-2                 | 22             | 6F  | Al             | 17,00             | 17,60 | 11,0 | –  | 22,0 | 10,0 | 16,0 | –   |
| 16T2,5/24-2                 | 24             | 6F  | Al             | 18,55             | 19,15 | 12,0 | –  | 22,0 | 10,0 | 16,0 | 4,0 |
| 16T2,5/25-2                 | 25             | 6F  | Al             | 19,35             | 19,95 | 13,0 | –  | 25,0 | 10,0 | 16,0 | 4,0 |
| 16T2,5/26-2                 | 26             | 6F  | Al             | 20,15             | 20,75 | 14,0 | –  | 26,0 | 10,0 | 16,0 | 4,0 |
| 16T2,5/28-2                 | 28             | 6F  | Al             | 21,75             | 22,35 | 14,0 | –  | 26,0 | 10,0 | 16,0 | 4,0 |
| 16T2,5/30-2                 | 30             | 6F  | Al             | 23,35             | 23,95 | 16,0 | –  | 26,0 | 10,0 | 16,0 | 6,0 |
| 16T2,5/32-2                 | 32             | 6F  | Al             | 24,95             | 25,55 | 16,0 | –  | 32,0 | 10,0 | 16,0 | 6,0 |
| 16T2,5/36-2                 | 36             | 6F  | Al             | 28,10             | 28,75 | 20,0 | –  | 36,0 | 10,0 | 16,0 | 6,0 |
| 16T2,5/40-2                 | 40             | 6F  | Al             | 31,30             | 31,90 | 22,0 | –  | 38,0 | 10,0 | 16,0 | 6,0 |
| 16T2,5/44-0                 | 44             | 6   | Al             | 34,50             | 35,10 | 24,0 | –  | –    | 10,0 | 16,0 | 6,0 |
| 16T2,5/48-0                 | 48             | 6   | Al             | 37,70             | 38,30 | 26,0 | –  | –    | 10,0 | 16,0 | 6,0 |
| 16T2,5/60-0                 | 60             | 6   | Al             | 47,25             | 47,85 | 34,0 | –  | –    | 10,0 | 16,0 | 8,0 |

**Zahnriemenscheiben  
(metrische T-Teilung)**

**T 5 (Teilung = 5 mm) – für Zahnriemenbreite = 10 mm**

| Artikel-Nr.<br>Ketten Fuchs | Zähne-<br>zahl | Typ | Werk-<br>stoff | Abmessungen in mm |       |      |    |      | W    | L    | D1  |
|-----------------------------|----------------|-----|----------------|-------------------|-------|------|----|------|------|------|-----|
|                             |                |     |                | de                | dp    | dm   | Di | df   |      |      |     |
| 21T5/10-2                   | 10             | 6F  | Al             | 15,05             | 15,92 | 8,0  | –  | 19,5 | 15,0 | 21,0 | –   |
| 21T5/12-2                   | 12             | 6F  | Al             | 18,25             | 19,10 | 11,0 | –  | 23,0 | 15,0 | 21,0 | –   |
| 21T5/14-2                   | 14             | 6F  | Al             | 21,45             | 22,29 | 13,0 | –  | 25,0 | 15,0 | 21,0 | –   |
| 21T5/15-2                   | 15             | 6F  | Al             | 23,05             | 23,88 | 16,0 | –  | 28,0 | 15,0 | 21,0 | 6,0 |
| 21T5/16-2                   | 16             | 6F  | Al             | 24,60             | 25,47 | 18,0 | –  | 32,0 | 15,0 | 21,0 | 6,0 |
| 21T5/18-2                   | 18             | 6F  | Al             | 27,80             | 28,65 | 20,0 | –  | 32,0 | 15,0 | 21,0 | 6,0 |
| 21T5/19-2                   | 19             | 6F  | Al             | 29,40             | 30,25 | 22,0 | –  | 36,0 | 15,0 | 21,0 | 6,0 |
| 21T5/20-2                   | 20             | 6F  | Al             | 31,00             | 31,83 | 23,0 | –  | 36,0 | 15,0 | 21,0 | 6,0 |
| 21T5/22-2                   | 22             | 6F  | Al             | 34,15             | 35,02 | 24,0 | –  | 38,0 | 15,0 | 21,0 | 6,0 |
| 21T5/24-2                   | 24             | 6F  | Al             | 37,40             | 38,21 | 26,0 | –  | 42,0 | 15,0 | 21,0 | 6,0 |
| 21T5/25-2                   | 25             | 6F  | Al             | 38,95             | 39,80 | 26,0 | –  | 44,0 | 15,0 | 21,0 | 6,0 |
| 21T5/26-2                   | 26             | 6F  | Al             | 40,60             | 41,39 | 26,0 | –  | 44,0 | 15,0 | 21,0 | 6,0 |
| 21T5/27-2                   | 27             | 6F  | Al             | 42,20             | 42,98 | 30,0 | –  | 48,0 | 15,0 | 21,0 | 8,0 |
| 21T5/28-2                   | 28             | 6F  | Al             | 43,75             | 44,58 | 32,0 | –  | 48,0 | 15,0 | 21,0 | 8,0 |
| 21T5/30-2                   | 30             | 6F  | Al             | 46,95             | 47,76 | 34,0 | –  | 51,0 | 15,0 | 21,0 | 8,0 |
| 21T5/32-2                   | 32             | 6F  | Al             | 50,10             | 50,94 | 38,0 | –  | 54,0 | 15,0 | 21,0 | 8,0 |
| 21T5/36-2                   | 36             | 6F  | Al             | 56,45             | 57,31 | 38,0 | –  | 64,0 | 15,0 | 21,0 | 8,0 |
| 21T5/40-2                   | 40             | 6F  | Al             | 62,85             | 63,66 | 40,0 | –  | 66,5 | 15,0 | 21,0 | 8,0 |
| 21T5/42-2                   | 42             | 6F  | Al             | 66,00             | 66,86 | 40,0 | –  | 70,0 | 15,0 | 21,0 | 8,0 |
| 21T5/44-0                   | 44             | 6   | Al             | 69,20             | 70,05 | 45,0 | –  | –    | 15,0 | 21,0 | 8,0 |
| 21T5/48-0                   | 48             | 6   | Al             | 75,55             | 76,42 | 50,0 | –  | –    | 15,0 | 21,0 | 8,0 |
| 21T5/60-0                   | 60             | 6   | Al             | 94,65             | 95,52 | 65,0 | –  | –    | 15,0 | 21,0 | 8,0 |


**T 5 (Teilung = 5 mm) – für Zahnriemenbreite = 16 mm**

| Artikel-Nr.<br>Ketten Fuchs | Zähne-<br>zahl | Typ | Werk-<br>stoff | Abmessungen in mm |       |      |    |      | W    | L    | D1  |
|-----------------------------|----------------|-----|----------------|-------------------|-------|------|----|------|------|------|-----|
|                             |                |     |                | de                | dp    | dm   | Di | df   |      |      |     |
| 27T5/10-2                   | 10             | 6F  | Al             | 15,05             | 15,92 | 8,0  | –  | 19,5 | 21,0 | 27,0 | –   |
| 27T5/12-2                   | 12             | 6F  | Al             | 18,25             | 19,10 | 11,0 | –  | 23,0 | 21,0 | 27,0 | –   |
| 27T5/14-2                   | 14             | 6F  | Al             | 21,45             | 22,29 | 13,0 | –  | 25,0 | 21,0 | 27,0 | –   |
| 27T5/15-2                   | 15             | 6F  | Al             | 23,05             | 23,88 | 16,0 | –  | 28,0 | 21,0 | 27,0 | 6,0 |
| 27T5/16-2                   | 16             | 6F  | Al             | 24,60             | 25,47 | 18,0 | –  | 32,0 | 21,0 | 27,0 | 6,0 |
| 27T5/18-2                   | 18             | 6F  | Al             | 27,80             | 28,65 | 20,0 | –  | 32,0 | 21,0 | 27,0 | 6,0 |
| 27T5/19-2                   | 19             | 6F  | Al             | 29,40             | 30,25 | 22,0 | –  | 36,0 | 21,0 | 27,0 | 6,0 |
| 27T5/20-2                   | 20             | 6F  | Al             | 31,00             | 31,83 | 23,0 | –  | 36,0 | 21,0 | 27,0 | 6,0 |
| 27T5/22-2                   | 22             | 6F  | Al             | 34,15             | 35,02 | 24,0 | –  | 38,0 | 21,0 | 27,0 | 6,0 |
| 27T5/24-2                   | 24             | 6F  | Al             | 37,40             | 38,21 | 26,0 | –  | 42,0 | 21,0 | 27,0 | 6,0 |
| 27T5/25-2                   | 25             | 6F  | Al             | 38,95             | 39,80 | 26,0 | –  | 44,0 | 21,0 | 27,0 | 6,0 |
| 27T5/26-2                   | 26             | 6F  | Al             | 40,60             | 41,39 | 26,0 | –  | 44,0 | 21,0 | 27,0 | 6,0 |
| 27T5/27-2                   | 27             | 6F  | Al             | 42,20             | 42,98 | 30,0 | –  | 48,0 | 21,0 | 27,0 | 8,0 |
| 27T5/28-2                   | 28             | 6F  | Al             | 43,75             | 44,58 | 32,0 | –  | 48,0 | 21,0 | 27,0 | 8,0 |
| 27T5/30-2                   | 30             | 6F  | Al             | 46,95             | 47,76 | 34,0 | –  | 51,0 | 21,0 | 27,0 | 8,0 |
| 27T5/32-2                   | 32             | 6F  | Al             | 50,10             | 50,94 | 38,0 | –  | 54,0 | 21,0 | 27,0 | 8,0 |
| 27T5/36-2                   | 36             | 6F  | Al             | 56,45             | 57,31 | 38,0 | –  | 64,0 | 21,0 | 27,0 | 8,0 |
| 27T5/40-2                   | 40             | 6F  | Al             | 62,85             | 63,66 | 40,0 | –  | 66,5 | 21,0 | 27,0 | 8,0 |
| 27T5/42-2                   | 42             | 6F  | Al             | 66,00             | 66,86 | 40,0 | –  | 70,0 | 21,0 | 27,0 | 8,0 |
| 27T5/44-0                   | 44             | 6   | Al             | 69,20             | 70,05 | 45,0 | –  | –    | 21,0 | 27,0 | 8,0 |
| 27T5/48-0                   | 48             | 6   | Al             | 75,55             | 76,42 | 50,0 | –  | –    | 21,0 | 27,0 | 8,0 |
| 27T5/60-0                   | 60             | 6   | Al             | 94,65             | 95,52 | 65,0 | –  | –    | 21,0 | 27,0 | 8,0 |

**Bestellbeispiel**

|    |           |                   |
|----|-----------|-------------------|
| 40 | T 10/30-2 | mit Bordscheiben  |
| -0 |           | ohne Bordscheiben |

**lieferbar:**

- mit Vorbohrung (siehe Maß d)
- mit Fertigbohrung und Nut nach DIN-Nr. 6885 (gemäß Ihren Angaben)