


HTD-Zahnriemenscheiben für Taper-Spannbuchsen

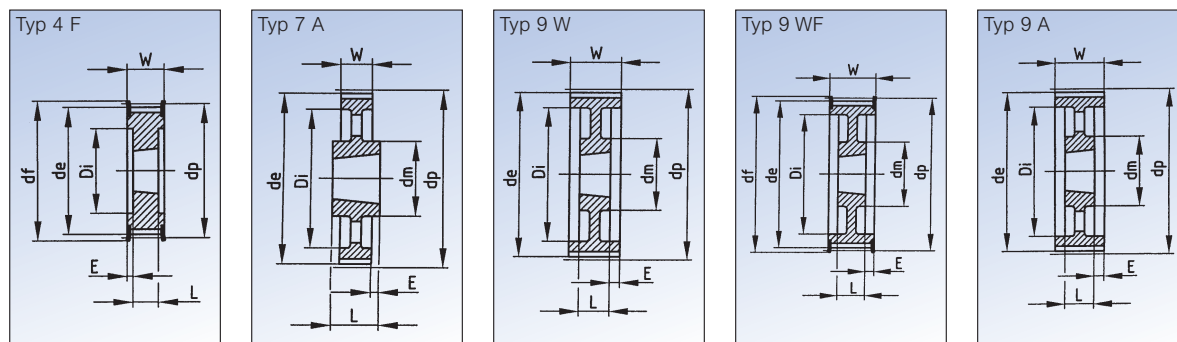

14M (Teilung = 14 mm) – für Zahnriemenbreite = 40 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse				Abmessungen in mm					
					de	dp	dm	Di	df	W	E	L	
TL28-14M-40	28	4F	St	2012	122,12	124,78	–	94,0	128,0	54,0	11,0	32,0	
TL29-14M-40	29	4F	St	2012	126,57	129,23	–	98,0	138,0	54,0	11,0	32,0	
TL30-14M-40	30	4F	St	2012	130,99	133,69	–	98,0	138,0	54,0	11,0	32,0	
TL32-14M-40	32	4F	St	2012	139,88	142,60	–	108,0	154,0	54,0	11,0	32,0	
TL34-14M-40	34	4F	St	2517	148,79	151,52	–	110,0	160,0	54,0	4,5	45,0	
TL36-14M-40	36	4F	St	2517	157,68	160,43	–	120,0	168,0	54,0	4,5	45,0	
TL38-14M-40	38	4F	St	2517	166,60	169,34	–	130,0	183,0	54,0	4,5	45,0	
TL40-14M-40	40	4F	St	2517	175,49	178,25	–	138,0	188,0	54,0	4,5	45,0	
TL44-14M-40	44	4F	St	3020	193,28	196,08	–	155,0	211,0	54,0	1,5	51,0	
TL48-14M-40	48	4F	St	3020	211,11	213,90	–	170,0	226,0	54,0	1,5	51,0	
TL56-14M-40	56	4F	St	3020	246,76	249,55	–	208,0	256,0	54,0	1,5	51,0	
TL64-14M-40	64	9WF	GG	3020	282,41	285,21	170,0	240,0	296,0	54,0	1,5	51,0	
TL72-14M-40	72	9W	GG	3020	318,06	320,86	170,0	280,0	–	54,0	1,5	51,0	
TL80-14M-40	80	9A	GG	3020	353,71	356,51	170,0	315,0	–	54,0	1,5	51,0	
TL90-14M-40	90	9A	GG	3020	398,28	401,07	170,0	360,0	–	54,0	1,5	51,0	
TL112-14M-40	112	9A	GG	3020	496,32	499,11	170,0	457,0	–	54,0	1,5	51,0	
TL144-14M-40	144	9A	GG	3020	638,92	641,71	170,0	600,0	–	54,0	1,5	51,0	
TL168-14M-40	168	9A	GG	3020	745,87	748,66	170,0	706,0	–	54,0	1,5	51,0	
TL192-14M-40	192	9A	GG	3020	852,82	855,62	170,0	813,0	–	54,0	1,5	51,0	
TL216-14M-40	216	9A	GG	3020	959,76	962,57	170,0	920,0	–	54,0	1,5	51,0	
TL264-14M-40	264	7A	GG	4040	1173,66	1176,47	230,0	1133,0	–	54,0	24,0	102,0	

14M (Teilung = 14 mm) – für Zahnriemenbreite = 55 mm

Artikel-Nr. Ketten Fuchs	Zähne- zahl	Typ	Werk- stoff	Buchse				Abmessungen in mm					
					de	dp	dm	Di	df	W	E	L	
TL28-14M-55	28	4F	St	2012	122,12	124,78	–	94,0	128,0	70,0	19,0	32,0	
TL29-14M-55	29	4F	St	2012	126,57	129,23	–	100,0	138,0	70,0	19,0	32,0	
TL30-14M-55	30	4F	St	2517	130,99	133,69	–	100,0	138,0	70,0	12,5	45,0	
TL32-14M-55	32	4F	St	2517	139,88	142,60	–	108,0	154,0	70,0	12,5	45,0	
TL34-14M-55	34	4F	St	2517	148,79	151,52	–	110,0	160,0	70,0	12,5	45,0	
TL36-14M-55	36	4F	St	2517	157,68	160,43	–	120,0	168,0	70,0	12,5	45,0	
TL38-14M-55	38	4F	St	2517	166,60	169,34	–	130,0	183,0	70,0	12,5	45,0	
TL40-14M-55	40	4F	St	2517	175,49	178,25	–	138,0	188,0	70,0	12,5	45,0	
TL44-14M-55	44	4F	St	3020	193,28	196,08	–	155,0	211,0	70,0	9,5	51,0	
TL48-14M-55	48	4F	St	3020	211,11	213,90	–	170,0	226,0	70,0	9,5	51,0	
TL56-14M-55	56	4F	St	3020	246,76	249,55	–	208,0	256,0	70,0	9,5	51,0	
TL64-14M-55	64	9WF	GG	3020	282,41	285,21	170,0	240,0	296,0	70,0	9,5	51,0	
TL72-14M-55	72	9W	GG	3020	318,06	320,86	170,0	280,0	–	70,0	9,5	51,0	
TL80-14M-55	80	9A	GG	3020	353,71	356,51	170,0	315,0	–	70,0	9,5	51,0	
TL90-14M-55	90	9A	GG	3020	398,28	401,07	170,0	360,0	–	70,0	9,5	51,0	
TL112-14M-55	112	9A	GG	3020	496,32	499,11	170,0	457,0	–	70,0	9,5	51,0	
TL144-14M-55	144	9A	GG	3020	638,92	641,71	170,0	600,0	–	70,0	9,5	51,0	
TL168-14M-55	168	9A	GG	3020	745,87	748,66	170,0	706,0	–	70,0	9,5	51,0	
TL192-14M-55	192	9A	GG	3020	852,82	855,62	170,0	813,0	–	70,0	9,5	51,0	
TL216-14M-55	216	7A	GG	3535	959,76	962,57	170,0	920,0	–	70,0	9,5	89,0	
TL264-14M-55	264	7A	GG	4040	1173,66	1176,47	230,0	1133,0	–	70,0	16,0	102,0	

Bestellbeispiel

		Zähnezahl 48
		Riementeilung 14 mm
TL48 14 M	40	Riemenbreite 40 mm