


Zahn- stangen

aus Stahl C45
für fortlaufende
Montage

alternativ aus
rostfreiem Stahl


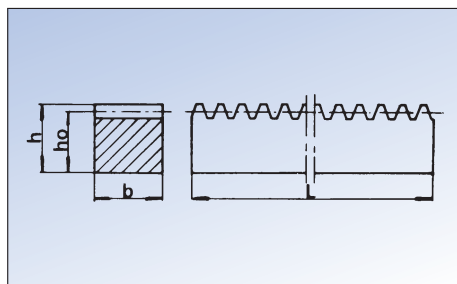


Artikel-Nr. Ketten Fuchs	Modul	Abmessungen in mm				Werkstoff	Gewicht kg
		L	b	h	ho		
430-010-050	1,0	500,0	15,0	15,0	14,0	C45	0,820
430-010-100	1,0	1000,0	15,0	15,0	14,0	C45	1,640
430-010-200	1,0	2000,0	15,0	15,0	14,0	C45	3,200
430-010-300	1,0	3000,0	15,0	15,0	14,0	C45	4,800
430-015-050	1,5	500,0	17,0	17,0	15,5	C45	1,000
430-015-100	1,5	1000,0	17,0	17,0	15,5	C45	2,050
430-015-200	1,5	2000,0	17,0	17,0	15,5	C45	4,000
430-015-300	1,5	3000,0	17,0	17,0	15,5	C45	6,000
430-020-050	2,0	500,0	20,0	20,0	18,0	C45	1,410
430-020-100	2,0	1000,0	20,0	20,0	18,0	C45	2,750
430-020-200	2,0	2000,0	20,0	20,0	18,0	C45	5,500
430-020-300	2,0	3000,0	20,0	20,0	18,0	C45	8,200
430-025-050	2,5	500,0	25,0	25,0	22,5	C45	2,100
430-025-100	2,5	1000,0	25,0	25,0	22,5	C45	4,500
430-025-200	2,5	2000,0	25,0	25,0	22,5	C45	9,000
430-025-300	2,5	3000,0	25,0	25,0	22,5	C45	13,400
430-030-050	3,0	500,0	30,0	30,0	27,0	C45	3,100
430-030-100	3,0	1000,0	30,0	30,0	27,0	C45	6,500
430-030-200	3,0	2000,0	30,0	30,0	27,0	C45	13,000
430-030-300	3,0	3000,0	30,0	30,0	27,0	C45	19,400
430-040-050	4,0	500,0	40,0	40,0	36,0	C45	5,500
430-040-100	4,0	1000,0	40,0	40,0	36,0	C45	11,000
430-040-200	4,0	2000,0	40,0	40,0	36,0	C45	23,000
430-040-300	4,0	3000,0	40,0	40,0	36,0	C45	34,000
430-050-050	5,0	500,0	50,0	50,0	45,0	C45	8,300
430-050-100	5,0	1000,0	50,0	50,0	45,0	C45	17,500
430-050-200	5,0	2000,0	50,0	50,0	45,0	C45	35,000
430-050-300	5,0	3000,0	50,0	50,0	45,0	C45	52,400
430-060-050	6,0	500,0	60,0	60,0	54,0	C45	12,650
430-060-100	6,0	1000,0	60,0	60,0	54,0	C45	25,500
430-060-200	6,0	2000,0	60,0	60,0	54,0	C45	51,000
430-060-300	6,0	3000,0	60,0	60,0	54,0	C45	76,400
430-100-200	10,0	2000,0	80,0	80,0	70,0	C45	77,000

Zahn- stangen

geradeverzahnt,
aus Azetalharz,
gespritzte
Ausführung

(Eingriffswinkel 20°)

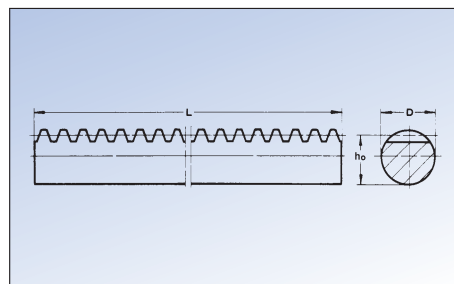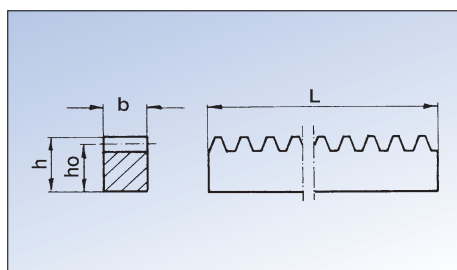

Rundzahn- stangen

aus Stahl C45

alternativ aus
rostfreiem Stahl

Artikel-Nr. Ketten Fuchs	Modul	Abmessungen in mm			Werkstoff	Gewicht kg
		L	D h9	ho		
431-010-050	1,0	500,0	10,0	9,0	C45	0,28
431-010-100	1,0	1000,0	10,0	9,0	C45	0,56
431-010-200	1,0	2000,0	10,0	9,0	C45	1,12
431-015-050	1,5	500,0	15,0	13,5	C45	0,64
431-015-100	1,5	1000,0	15,0	13,5	C45	1,28
431-015-200	1,5	2000,0	15,0	13,5	C45	2,56
431-020-050	2,0	500,0	20,0	18,0	C45	1,14
431-020-100	2,0	1000,0	20,0	18,0	C45	2,28
431-020-200	2,0	2000,0	20,0	18,0	C45	4,52
431-025-050	2,5	500,0	25,0	22,5	C45	1,78
431-025-100	2,5	1000,0	25,0	22,5	C45	3,56
431-025-200	2,5	2000,0	25,0	22,5	C45	7,12
431-030-050	3,0	500,0	30,0	27,0	C45	2,59
431-030-100	3,0	1000,0	30,0	27,0	C45	5,14
431-030-200	3,0	2000,0	30,0	27,0	C45	10,28
431-040-050	4,0	500,0	40,0	36,0	C45	4,56
431-040-100	4,0	1000,0	40,0	36,0	C45	9,12
431-040-200	4,0	2000,0	40,0	36,0	C45	18,24
431-050-050	5,0	500,0	50,0	45,0	C45	7,10
431-050-100	5,0	1000,0	50,0	45,0	C45	14,20
431-050-200	5,0	2000,0	50,0	45,0	C45	28,40
431-060-050	6,0	500,0	60,0	54,0	C45	10,28
431-060-100	6,0	1000,0	60,0	54,0	C45	20,56
431-060-200	6,0	2000,0	60,0	54,0	C45	41,12

Artikel-Nr. Ketten Fuchs	Modul	Abmessungen in mm				Werkstoff	Gew. kg
		L	b	h	ho		
ZH-0525	0,5	250,0	4,0	4,5	4,0	Polyacetal gespritzt	0,06
ZH-0525-S	0,5	250,0	4,0	6,0	5,5	Polyacetal gespritzt	0,08
ZH-0725	0,7	250,0	6,0	6,7	6,0	Polyacetal gespritzt	0,13
ZH-1025	1,0	250,0	9,0	9,0	8,0	Polyacetal gespritzt	0,25
ZH-12525	1,25	250,0	10,0	11,0	9,75	Polyacetal gespritzt	0,34
ZH-1525	1,5	250,0	12,0	12,0	10,5	Polyacetal gespritzt	0,43
ZH-2025	2,0	250,0	15,4	11,0	9,0	Polyacetal gespritzt	0,44
ZH-3025	3,0	250,0	19,4	15,0	12,0	Polyacetal gespritzt	0,76

Messzahnstangen gerade- und schrägverzahnt in mm-Teilung auf Anfrage.